



POS-NR.	BENENNUNG	BESCHREIBUNG	MENGE
1	129 340 01144	Grundplatte	1
2	129 940 01244	Grundplatte	1
3	129 347 520	Crossbar, T1 IDF	1
4	129 847 0100HD	Gewindestück, 100mm	2
5	129 875 000	Winkelgelenk links	2
6	129 876 000	Winkelgelenk rechts	2
7	129 345 000	Hebel	1
8	129 343 130IDF	Hebel	1
9	129 344 130IDF	Hebel	1
10	GISW08-2	Rod End Bearing	2
11	129 343 CB69	Hebel, links	1
12	129 344 CB25	Hebel	1
13	129 343 014	Anschlag	1
14	129 347 000	Stift	1
15	21788	Schenkelfeder	1
16	133 139 022	Lagerbolzen	1
17	009 0125 06	Scheibe DIN125 6,4	3
18	009 0125 08A2	Scheibe DIN125, D8.4 A2	3
19	009 0127 05A2	Federring, DIN127 D5.2 A2	4
20	009 0127 06	Federring, DIN127 M6	8
21	009 0137B 08A2	Scheibe DIN137B, D8.4 A2	3
22	009 0439 10A2	Mutter, DIN439 A2	1
23	009 0931 0635A2	Schraube, DIN931 M6x35 A2	3
24	009 0933 0816A2	Schraube DIN933, M8x20 A2	2
25	009 0933 0825A2	Schraube, DIN933 M8x25 A2	1
26	009 0934 05	Mutter, DIN934 M5	2
27	009 0934 05LKS	Mutter, DIN934 M5-links	2
28	009 0934 06	Mutter, DIN934	8
29	009 0934 07	Mutter, DIN934 M7	2
30	009 0939 0625	Stiftschraube, DIN939, M6x25	4
31	009 0939 0640	Stiftschraube, DIN939, M6x40	4
32	009 0985 06	Mutter, DIN 985, M6	3

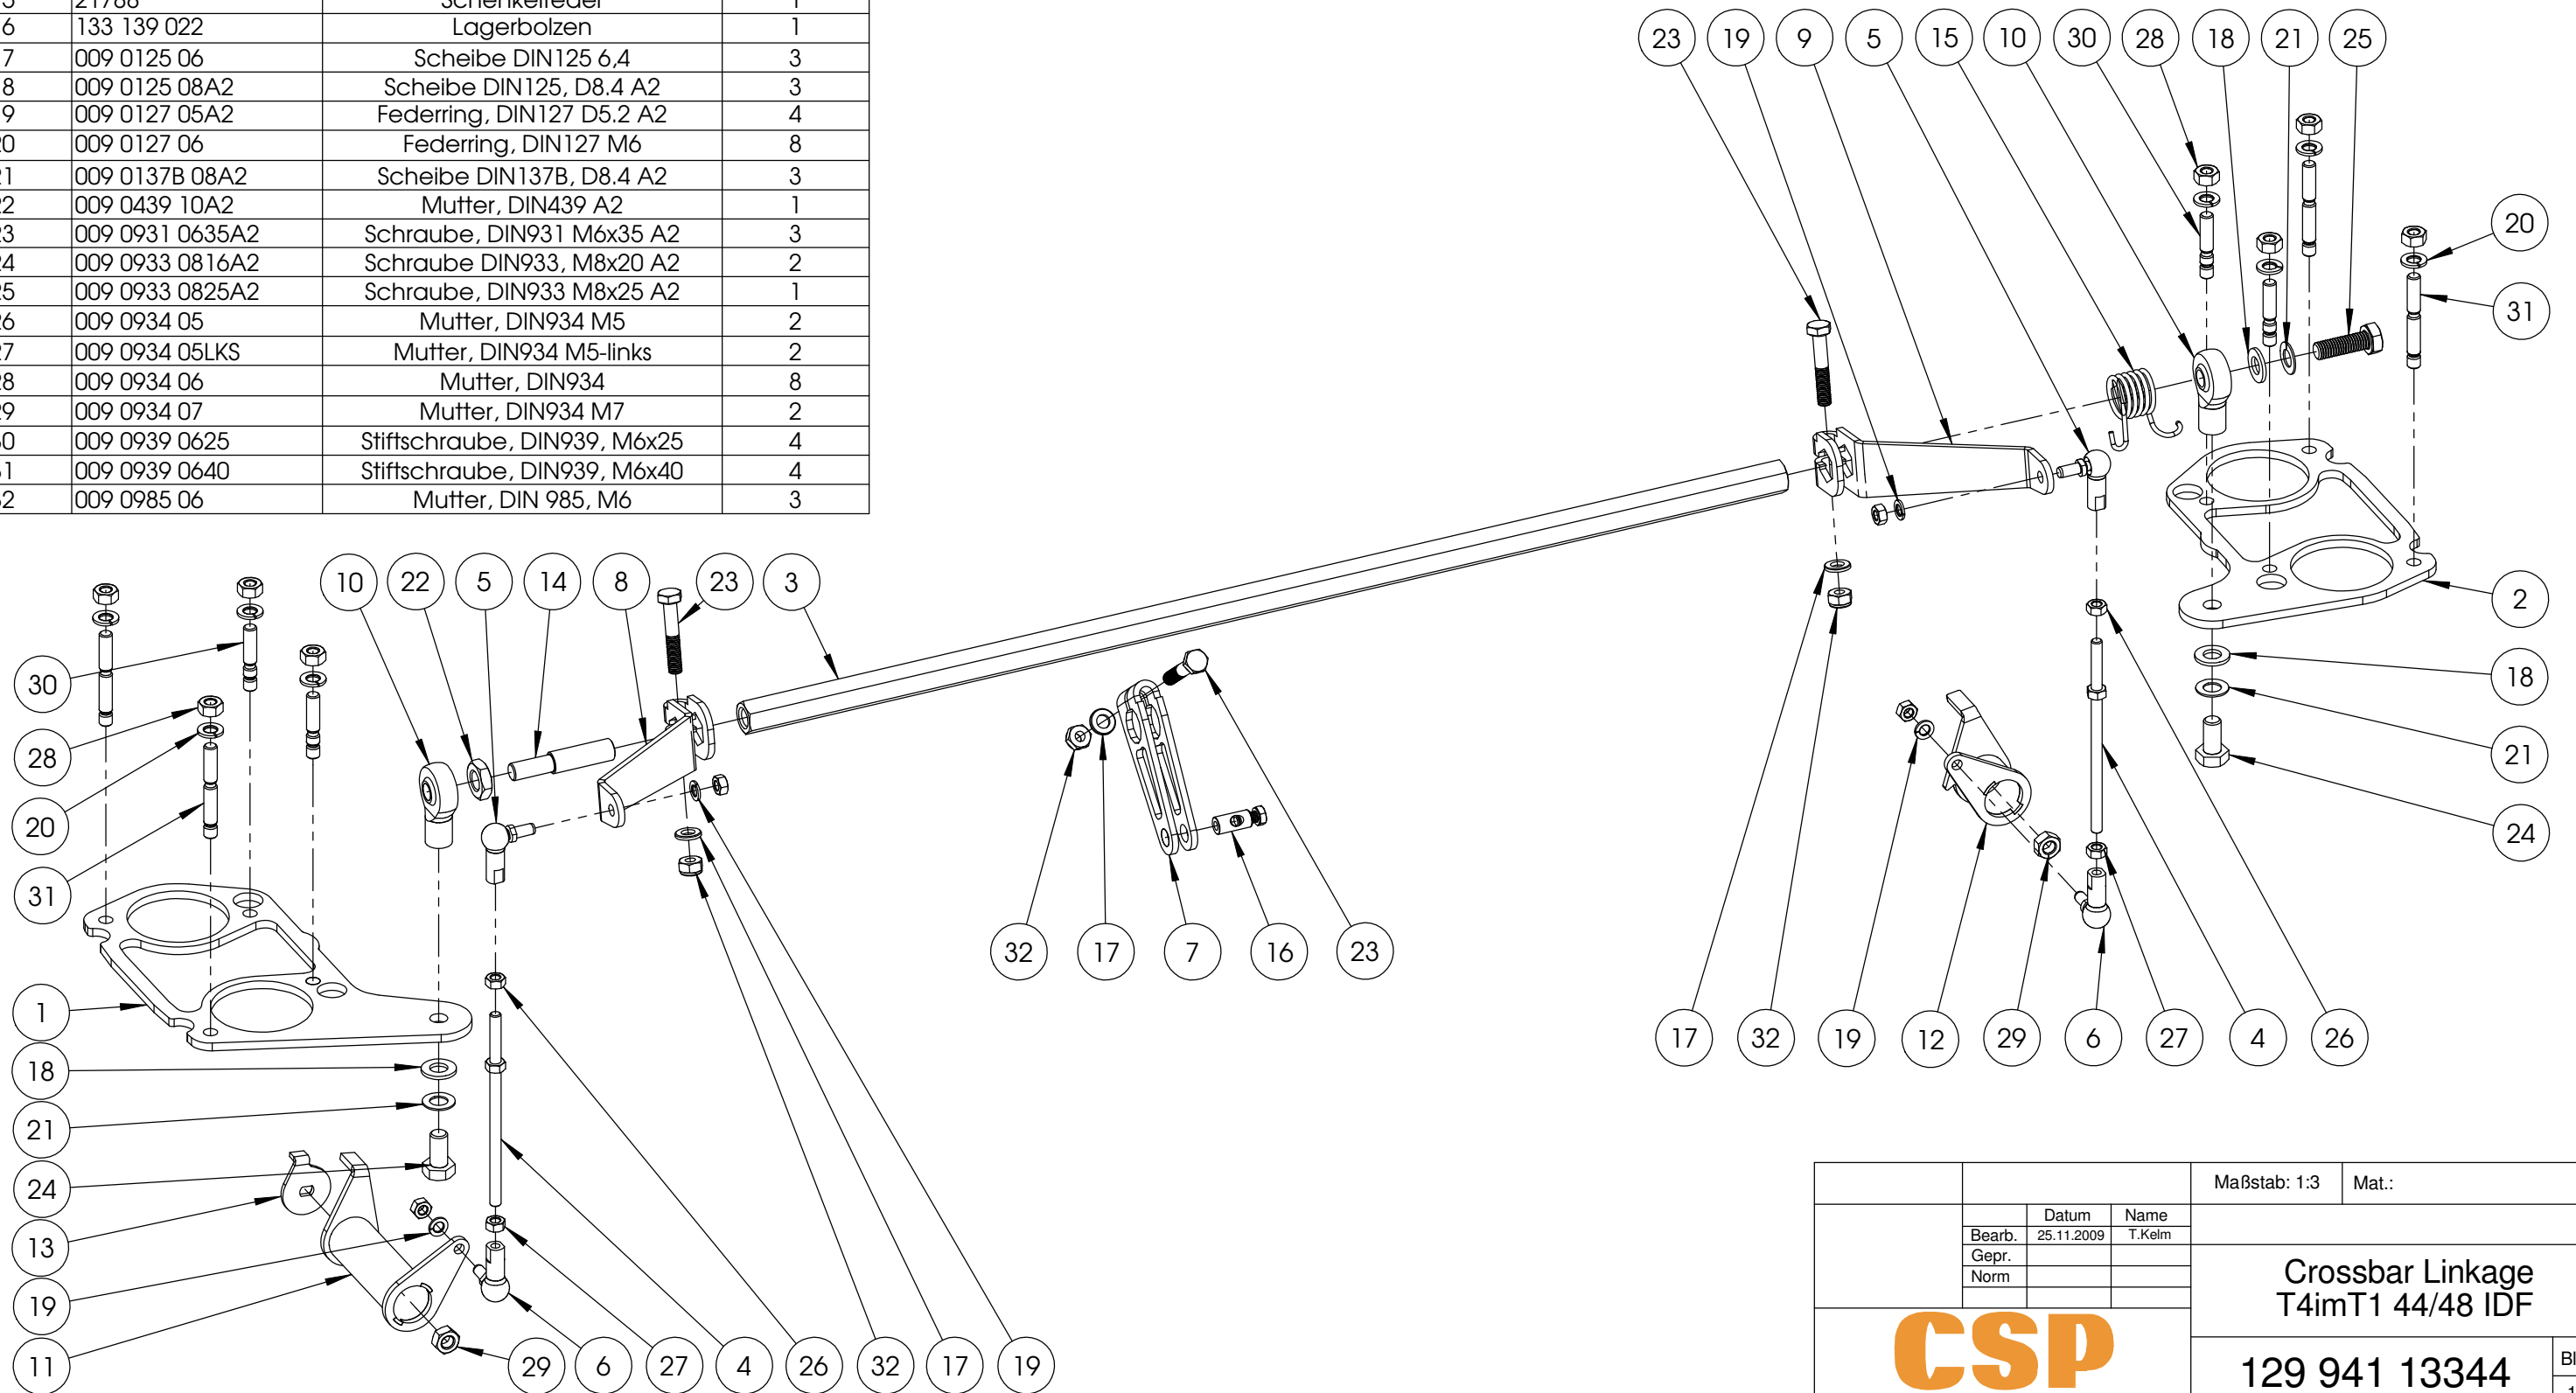

		Maßstab: 1:3	Mat.:
	Datum	Name	
Bearb.	25.11.2009	T.Kelm	
Gepr.			
Norm			
 CSP GmbH - Am Redder 3 - 22941 Bargtheide		Crossbar Linkage T4imT1 44/48 IDF	
		129 941 13344	Blatt 1 1 Bl.
		Allgemeintoleranz ISO 2768 - m	Revision: A